

## 4-POINT BENDING STIFFNESS TESTER 4PF-50 model

To determine quickly and accurately the 4-Point Bending Stiffness on standardized samples of Corrugated Board according to the International Standard ISO 5628



The Bending Stiffness is the ratio between the bending moment applied to a standard sample according to ISO 5628 and the deflection within the elastic area.

The Bending Stiffness of Corrugated Board is of great importance to achieve a great stacking strength and BCT in the boxes.

What primarily determine this Bending Stiffness are the mixture of the corrugated board thickness and the tensile strength of the liner papers.

### The 4PF-50 model 4-POINT BENDING Stiffness Tester allows to:

- ✓ Measure the maximum force in Nm
- Determine the quality and the performance of the corrugated board used in the process.
- ✓ Perform Quality Control, Development and Innovation



	Portable Core i3 laptop PC interface for Data Acquisition and Control
	Universal LYNX Test Programme – included
	Statistics: Min, Max, Average, Standard Deviation, Gauss Bells, Tolerances and Bars
	Save – Print – Copy to Office Clipboard
	Languages: English – Spanish – German & French
	Easy to use
	Robust and highly accurate
	500 N Force Capacity (others available upon request)
	USB interface f/connection to a PC
	Quick return to initial start position
	Improve Your Quality System to ISO 9000
	Eliminates Human Error
(*)	It is possible to integrate in: Advanced Management Laboratory Software LYNX Plus & Pro (for multiple test
` '	equipment connection)
	equipment connection)
SPE	CIFICATIONS
SPE	
	Viewing the bending force and the deformation produced, with maximum values retention
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable Units selection: Kg - N o Lb
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable Units selection: Kg - N o Lb Programmable test speed from 1 y 1000 mm / min
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable Units selection: Kg - N o Lb Programmable test speed from 1 y 1000 mm / min USB interface for connection to a PC
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable Units selection: Kg - N o Lb Programmable test speed from 1 y 1000 mm / min USB interface for connection to a PC Equipped with load cell of 500 N (standard)
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable Units selection: Kg - N o Lb Programmable test speed from 1 y 1000 mm / min USB interface for connection to a PC Equipped with load cell of 500 N (standard) Reading resolution 1/100.000 full scale: 0,005N
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable Units selection: Kg - N o Lb Programmable test speed from 1 y 1000 mm / min USB interface for connection to a PC Equipped with load cell of 500 N (standard) Reading resolution 1/100.000 full scale: 0,005N Accuracy: < 1 % of the applied strength for a range between 2 and 100 % of full scale
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable Units selection: Kg - N o Lb Programmable test speed from 1 y 1000 mm / min USB interface for connection to a PC Equipped with load cell of 500 N (standard) Reading resolution 1/100.000 full scale: 0,005N Accuracy: < 1 % of the applied strength for a range between 2 and 100 % of full scale Maximum crosshead travel: 500 mm
	Viewing the bending force and the deformation produced, with maximum values retention Statistics: Average and standard deviation Quick return to initial start position Breaking level programmable Units selection: Kg - N o Lb Programmable test speed from 1 y 1000 mm / min USB interface for connection to a PC Equipped with load cell of 500 N (standard) Reading resolution 1/100.000 full scale: 0,005N Accuracy: < 1 % of the applied strength for a range between 2 and 100 % of full scale

CONNECTIONS:

**DELIVERY CONTENT:** 

Electrical: 110V/60 Hz or 230V/50Hz single-phase

> 4PF-50 model 4-Point Bending Tester

> Load cell of 500 N

DIMENSIONS AND WEIGHT:

> 15" Laptop PC with Windows OS > LYNX Universal Testing software

Dimensions: 420 x 670 x 950 mm (W x D x H)

Box for transport apprx.: 600 x 870 x 1250 mm (W x D x H)

. LYANY MAANIA CEMAENT MACRIME

Weight Net/Gross approx.: 75 Kg / 120 Kg

> LYNX MANAGEMENT MODULE with Basic statistics

<sup>\*</sup> TECHLAB SYSTEMS reserves the right to do any technical modification without advance notice







## "Data in Real Time..."

- Quickness carrying out tests and obtaining results
- No human mistakes
- □ Traceability according to ISO 9000

# Software LYNX Universal Tests TENSILE – COMPRESSION – BENDING – FRICTION and TEAR

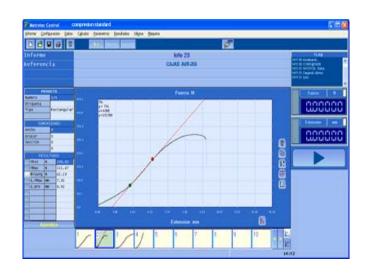

- It marks Maximum-Minimum-Medium Values and Standard Deflection
- Up to 100 tests storing capacity for each report
- SAVE-PRINT-OFFICE CLIPBOARD FUNCTIONS Reports in PDF format



### THE STANDARD DELIVERY INCLUDES:

**♣ VIDEO-CAPTURE Testing System** 


(hardware + software)


Allows the video recording during a Tensile, Compression, Flexion... test through a webcam, the video being linked to the test

#### **INCLUDED: LYNX MANAGEMENT MODULE with Basic Statistics**

The LYNX Management Module allows you to manage the data generated, choose the interface language, prepare and print reports that you can customize with your logo, change the testing units, different user password levels, introduce the minimum, maximum and optimal values to manage data with statistics, charts bars, GAUSSEN Bell, tolerances comparatives, export data to Word - Excel ..., PDF generation and more.









Doc.: LYNX\_UNIVERSAL\_TESTS-1-CAT-I-R1

<sup>\*</sup> TECHLAB SYSTEMS reserves the right to do any technical modification without advance notice