


MicroLance insertion moisture meter

P
product sheet



Features

- ▶ instantaneous moisture and temperature display
- ▶ robust practical design
- ▶ simple operation
- ▶ accurate on-site readings
- ▶ spot sample or heap average measurement

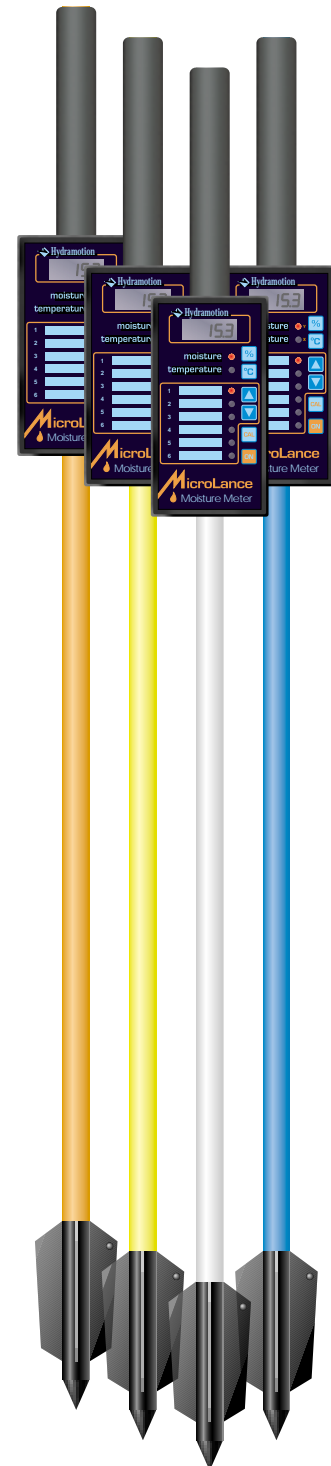

Specification

Measurement Response:	2 seconds
Moisture Range:	0-25%
Moisture Resolution:	±0.1%
Moisture Accuracy:	±0.5% of reading
Temperature Range:	-20°C to 60°C
Temperature Resolution:	0.1°C
Temperature Accuracy:	<0.5°C
Weight:	1500g
Material Selections:	6 (user configurable)
Power Requirements:	4 x 1.5v AA alkaline cells (or equivalent)
Shaft Colour Options:	Grey / Orange / Yellow / Blue

Hydramotion Ltd
1 York Road Park,
Malton, York,
England YO17 6YA

tel: +44 (0) 1653 600294
fax: +44 (0) 1653 693446
mail@hydramotion.com
www.hydramotion.com