


VALIDATOR™ COMPRESSION TESTER

To perform compression and resistance tests to packaging according to International Standard specifications.

Applicable standards: UNE EN 137001 - ISO 12048 - DIN EN 22872 - TAPPI T804 - FEFCO 50 - AFNOR H 13-001 - JIS & ISTA...

- ❑ Force capacity: 25 kN
- ❑ Platen size: 800 X 800 mm
- ❑ 3 Load cells for highly accurate testing
- ❑ Top fixed parallel plate (TAPPI)
- ❑ Oscillating Platen System (according to ISO)
- ❑ Strength reading in N, Kg or Lb
- ❑ Automatic platen return after each test for easy loading of next specimen
- ❑ RS-232 interface
- ❑ Compatible with LYNX Plus and Pro where you can integrate all of your test equipment and data management into one system
- ❑ VIDEO CAPTURE Testing System included

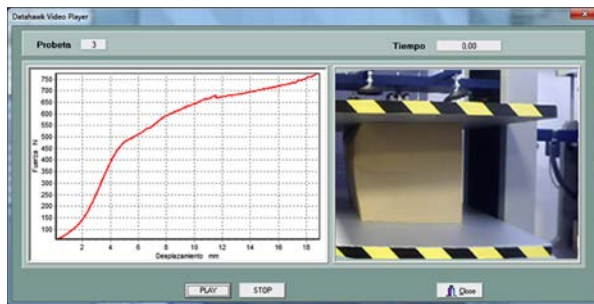

Optional accessory : Inclination record (by Inclinometer)


INCLUDED:

LYNX™ Software for Packing & Packaging Compression Test
 + **LYNX Management Module with basic statistics**, with control from PC
 in **closed loop** using our software test pack with 3 test modules:

- **BCT Test Module** (standard test)
- **Constant Load** (Stacking test)
- **Cyclic Test Module** (Dynamic strain according to Strength and Stroke.)



- Dynamic Testing
- Static Testing
- Custom Fields
- Variable Test Rate
- Company Logos
- Closed Loop Control
- Spanish/English/German/French
- All-in-One PC Touch Screen 22" included

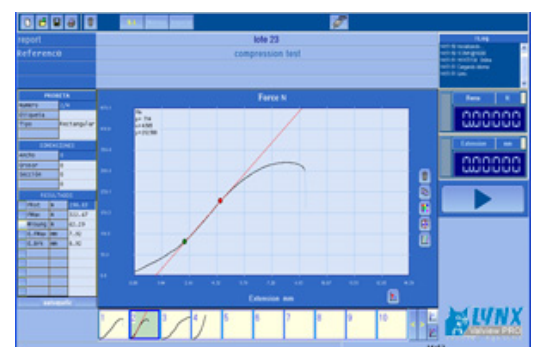

- Force range** 25 KN (5,620 lbf)
- Load Measuring System** 3 precision load cells (prevents side loading errors) .03 % FS accuracy
- Drive System** DC variable speed drive system
- Displayed System Resolution**
 - Load: 0,25 N (0.056 lbf.)
 - Platen Displacement: 0. 001 mm (0.000040 in.)
 - Platen Speed: 0,1 mm/min. (0.0040 in./min.)
- Platen Flatness** Flat within 0.25 mm (0.01 in.)
- Parallelism of Platens** Parallel within ± 1 mm (± 0.04 in.)
- Safety Features**
 - E-Stop
 - Over-Load Protection in software
 - Upper and lower limit switches
 - Load sensor with automatic retreat
 - Communications failure detection integrated with automatic stop
- Variable Platen Test Speed** 1 – 350 mm/min (0.04 – 13,78 in./min.)
- Platen Retract Speed** 350 mm/min. (13,78 in./min.)
- Guidance of the platen** By means of low friction column-guided linear bearings.
- The equipment** Is mounted with silence dampening and anti-vibration blocks.
- Output interface** RS-232

STRENGTH MEASURE

- Select units : Newtons, Kg & Pounds

EXTENSION MEASURE (DEFORMATION)

- Select units: millimeters & inches

BOX COMPRESSION TESTER - VALIDATOR™							
MODEL	RANGE KN	RESOLUTION N	PLATENS mm	STROKE mm	DIMENSIONS W x D x H / mm	WEIGHT Kg	POWER w
VALIDATOR	25	0,25	800 x 800	800	1100 x 955 x 1570	435	800


POWER SUPPLY: 110V/60Hz or 220V/50Hz single phase

PACKAGING DIMENSIONS: 1300 x 1200 x 1750 (W x D x H)

GROSS WEIGHT: 625 Kg (Treated wood packaging)

With OSCILLATING & FIXED PLATE SYSTEM


For Compresión Tests according to
TAPPI - ISO & FEFCO standards

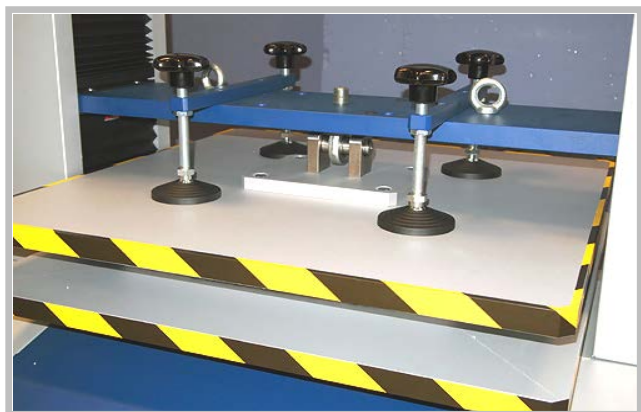

THE STANDARD DELIVERY INCLUDES:

- ❑ **VIDEO-CAPTURE Testing System (hardware + software)**


Allows the video recording during a compression test through a webcam, the video being linked to the test

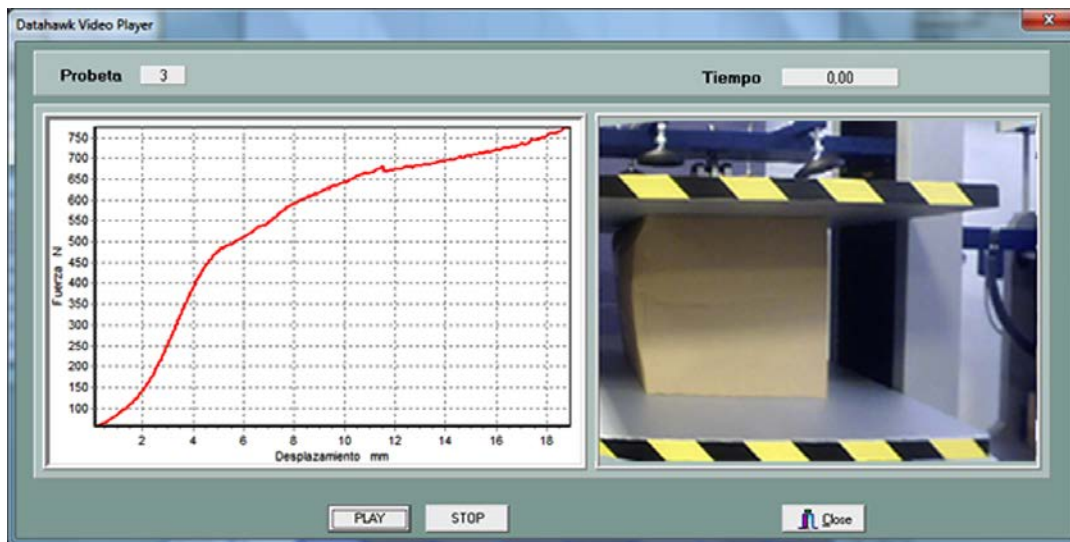

OPTIONAL ACCESSORY :

Electronic Inclinometer (** This accessory can only be installed with the Oscillating Plate System)

Allows the registration of tilt angle on the axis "X" and "Y" during the test

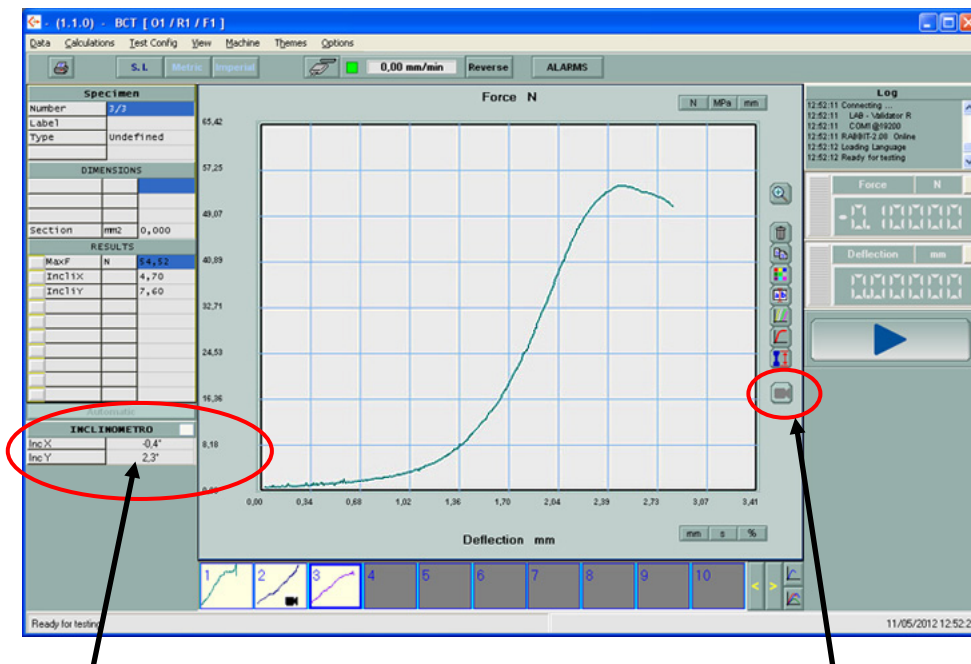

Record of the inclination in the X and Y axes

Activation button Graph Viewer and Video synchronized

DELIVERY CONTENT:

- ✓ VALIDATOR Compression Tester + Packing & Packaging Compression Test Software
- ✓ LYNX™ (included 3 test Modules BCT, CONSTANT LOAD, and CYCLIC Tests)
- ✓ LYNX™ MANAGEMENT MODULE with Basic Statistics
- ✓ Video Capture Testing System (Hardware + Software)
- ✓ All-in-One PC Touch Screen PC 22" - Windows 10 Home Operative System

* TECHLAB SYSTEMS reserves the right to do any technical modification without advance notice

* Windows is a Trade mark of Microsoft Corporation





LYNX Test Program for PACKAGING and PACKING COMPRESSION

“Data in Real Time...”



COMPRESSION TESTS modes





- ✓ BCT Module
- ✓ CONSTANT LOAD Module
- ✓ CYCLIC Module

- Enhances quickness in carrying out tests and in obtaining results.
- Reduces human error.
- Traceability according to ISO 9000
- The software records minimum, maximum, and median value as well as standard deviation
- Up to 100 tests of measurement capacity for each report
- SAVE, PRINT and COPY to Office Clipboard functions

When combing this test software with your compression system, it is possible to perform box crush tests, constant load compression, and cyclic compression tests. Machine operation is managed via the software, and all data is captured with the software. The data is displayed in real time on your monitor, and then saved and can be retrieved easily in the future.

INCLUDED: LYNX MANAGEMENT MODULE with Basic Statistics

The LYNX Management Module allows you to manage the data generated, choose the interface language, and prepare and print reports (that you can customize with your logo). You can also change the units displayed, as well as change user accounts and passwords. You can also record the minimum, maximum and optimal values to manage data with statistics, charts bars, GAUSSEN Bell, tolerances comparatives and export this data to Word, Excel, PDF and more.

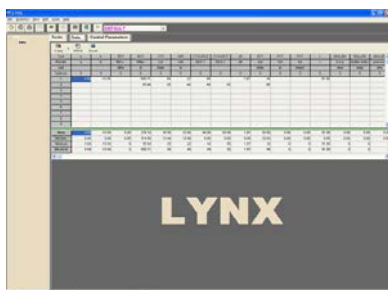

* TECHLAB SYSTEMS reserves the right to do any technical modification without advance notice